




SCREENLOGIC® INTERFACE WIRELESS CONNECTION KIT FOR INTELLIANT® AND EASY TO CONTROL SYSTEM

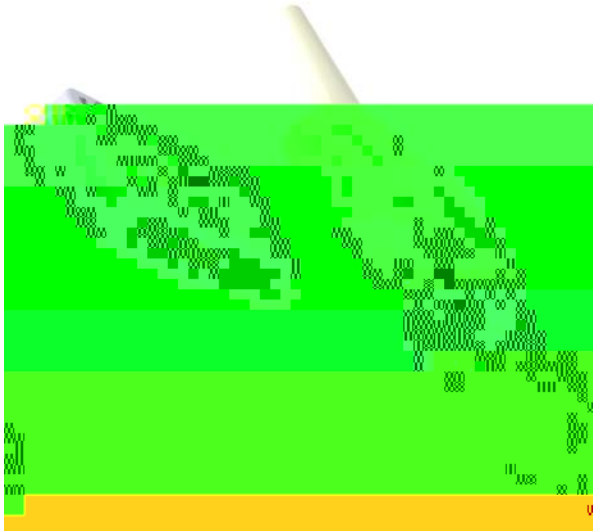

INSTALLATION GUIDE

IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS



Sanford, North Carolina (8 A.M. to 4:30 P.M.)
Phone: (800) 831-7133
Fax: (919) 566-8920
Moorpark, California (8 A.M. to 4:30 P.M.)
Phone: (800) 831-7133 (Ext. 6502)
Fax: (805) 530-0194
Web sites: visit www.pentairpool.com and www.staritepool.com

Related manual: ScreenLogic® Interface User's Guide (P/N 520493)

Contents


Overview	1
Summary installation steps	1
In this Installation Guide	1
ScreenLogic Interface Wireless Connection Kit Contents	2
Step 1: Mount the Outdoor Wireless Transceiver and Connect to the	

The ScreenLogic® Interface Wireless Connection interface consists of an indoor and outdoor wireless 2.4 GHz transceiver. *Note: The transceivers ship from the factory as a matched pair. The ID numbers on each transceiver must be the same number to function correctly. Transceivers are replaced as a matched pair. For more information, call Customer Support (880) 831.7133.*

The transceivers provides a wireless connection between the ScreenLogic Interface Protocol adapter and the IntelliTouch® or EasyTouch® Control System Load Center located at the equipment pad. This wireless connection eliminates the existing hard wire connection from inside your home to the equipment pad.


The following items are included in the Wireless Connection kit.

- One ScreenLogic Interface indoor wireless transceiver with AC power adapter and one foot connection cable with attached plugs.
- One ScreenLogic Interface outdoor wireless transceiver with 10 ft. cable, provided in kit with enclosure and mounting hardware.
- ScreenLogic Interface Wireless Connection Installation Guide (this manual)



ScreenLogic Interface Wireless Connection Kit Contents

SCREENLOGIC® INTERFACE Wireless Connection Kit Installation Guide

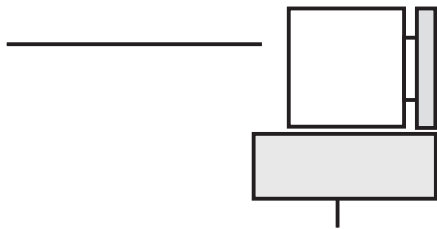

Step 1:**Mount the Outdoor Wireless Transceiver and Connect to the IntelliTouch[®] or EasyTouch[®] Control System Load Center**


The following describes how to mount the transceiver to the IntelliTouch[®] or EasyTouch[®] Control System Load Center and connect the four-wire cable to the COM port connector located in the IntelliTouch or EasyTouch Control System Load Center:

Mount the Transceiver Module


The Transceiver is a two-way radio device with an attached antenna that communicates to and from the IntelliTouch or EasyTouch Control System. Mount the transceiver at a convenient location (on a flat vertical surface) near the load center at a minimum of 5 feet above ground level to optimize the transmit and receive operating range.

1. Remove the two retaining screws located on the underside of the transceiver case. Slide the case off the back plate.

Note: Install the ScreenLogic[®] Interface outdoor

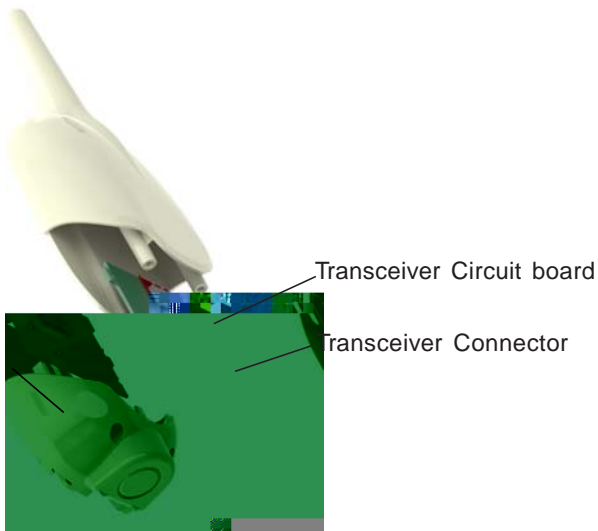

7. After the connection has been completed, close the control panel into its original position and secure it with the two access screws.
8. Install the front panel and secure it with the two retaining screws.
9. Close the Load Center front door. Fasten the spring latch(es).
10. Switch the power on to the IntelliTouch[®] or EasyTouch[®] Control System Load Center.
11. Proceed to the “Connect the ScreenLogic Interface Indoor Wireless Transceiver to the ScreenLogic Interface Protocol Adapter ” on page 8.



ScreenLogic Interface Protocol Adapter



